NAVIGATOR & SCOUT Class Safety Inspection Tutorial

This tutorial goes through the safety practices required by the MATE ROV Competition. It covers:

- Initial Safety Inspection (if required)
- Onsite Safety Inspection
- Examples and photographs of what will and will not pass safety inspection

DOCUMENTATION REQUIRED

DOC-001: Companies must provide a system interconnection diagram (SID) of their vehicle control system. An SID is an electrical diagram of their wiring, including their control box, motors, and any other electrical systems on their vehicle. The SID should separate and show what systems are on the surface and what systems are on the vehicle.

The SID is the starting point for Scout & Navigator Safety.

Companies should be aware of safety and everyone is required to submit a SID, if not early by the regional, it must be present for the on-site safety inspection.

DOC-002: Any electrical diagram should use ANSI, NEMA, or IEC symbols. They should be neatly hand drawn or created using a CAD software program.

DOC-003: Companies using fluid power must submit a fluid interconnection diagram (Fluid SID) of their system. Companies using syringe hydraulics only need a simple diagram, and could include it on their electrical SID. NAVIGATOR companies using powered pumps or compressors MUST include a full fluid SID.

Initial Safety Inspection & Documentation Review Score Sheet

Company Name:			e:	Company Number:				
	2019 MATE ROV Competition							
	Innovations for Inshore: ROV Operations in Rivers, Lakes and Dams							
NAVIGATOR/SCOUT CLASS INITIAL SAFETY AND DOCUMENTATION REVIEW								
Submission is on time, within the given size limit, uses the proper naming convention, is a PDF file, and is submitted with the other documents.								
	1	0	All documentation complies with submission guidelines					
	1	0	SID is 1 page in length and differentiates between above and be					
	1	0	SID shows a fuse and fuse uses a proper IEC, NEMA, or ANSI sym	bol				
	1	0	SID shows fluid power components or company states fluid power is not used on ROV					
	1	0	ROV uses Anderson powerpole connectors and fuse is within 30 cm of connection to power					
	1	0	All components are securely attached to ROV					
	1	0	Tether is properly secured with strain relief at both ends					
	1	0	Motors are waterproofed and propellers are shrouded or completely inside the ROV frame					
	1	0	No sharp or hazardous items					
	1	0	Camera operates of 12VDC supply or a camera is NOT used on the vehicle.					
TOTAL POINTS:		POINTS	:					

Initial Safety Review

Simple Check Points

- Turned in on time?
- Documentation correct format and size?
- SID neatly done and includes industry standard fuse symbol?
- Any Fluid Power?
- Any issues seen will be listed.

*The Initial Safety Inspection and Documentation Review score sheets will only be used if your regional requires prior submission of documents. Check your regional website's Competition Information document or contact your regional coordinator to determine whether documentation must be submitted prior to competition day.

Onsite Safety Inspection

Safety is the competition's primary concern and guiding principle. Any system that is considered unsafe by competition officials will not be allowed to compete.

If a concern is found during the first safety inspection, companies are permitted to attempt to correct it and have their ROV re-inspected. However, the competition schedule will NOT change to allow companies more time.

Companies are allowed to have their vehicle re-inspected twice. If a company fails to pass its third and final safety inspection, it is disqualified from the underwater competition portion of the event. There are NO APPEALS once your ROV has been disqualified.

Onsite Safety Inspection

Examples of safety violations from previous ROV competitions include:

- The ROV does not use Anderson Powerpole connectors to attach to main power.
- No SID was provided at the safety check.
- The SID did not show a main fuse.
- The ROV used pneumatics, but the technical documentation did not include a pneumatics diagram (fluid SID).
- Sharp items, or potentially sharp items, (fishing hooks, glass bottles) were included on the vehicle.
- The vehicle motors were not waterproofed.
- Propellers were not protected inside the framework or not shrouded.
- Camera did not operate off the 12 volt MATE power supply.

Onsite Safety Inspection

Competition staff will conduct a safety inspection of the vehicle using the safety inspection rubric.

If the safety inspector(s) identify a safety violation, companies will have the opportunity to address it. The pool practice or product demonstration run schedule will NOT change to allow companies more time.

If during the second safety review the

a. violation has not been properly addressed or

b. another violation is revealed

companies will have ONE additional opportunity to address the issue.

2019 SCOUT SAFETY INSPECTION SHEET

COMPANY NAME:

COMPANY NUMBER:

2019 MATE ROV COMPETITION Innovations for Inshore: ROV Operations in Rivers, Lakes, and Dams

SCOUT CLASS SAFETY CHECK LIST

Companies must bring this check list, the ROV, tether, surface controls, and any other item used in the deployment and operation of the ROV. They will all be inspected as part of the safety check. In addition, the SID, Technical Report and any additional documentation needed to verify compliance must be made available to Safety Inspectors during the inspection process.

1.0 Ini	itial Inspection Results
	Fluid Power appropriate for class (manual pumps
	only – see section 4.0.
2.0 R	OV Physical
	All items attached to ROV are secure.
	Hazardous items are identified and protection
	provided.
	ALL Propellers are completely shrouded or are
	enclosed inside the frame of the ROV.
	No sharp edges or elements of ROV design that
	could cause injury to personnel or damage to pool
	surface.
3.0 RC	OV Electrical
	Tether is properly secured at the ROV.
	No exposed motors.
	Brushless motors are considered exposed unless
	electrically sealed after purchase. Companies
	should provide proof of sealing procedure.
	No exposed copper or bare wire.
	All wiring securely fastened and properly sealed*.
	Any splices in tether are properly sealed*.
3.1 Su	rface Controls Electrical & Physical
	Single attachment point to power source.
	Anderson Power Plugs for electrical attachment
	15 amp (or less) single inline fuse within 30cm of
	power supply attachment point.
	Surface control station is built in a neat and
	workmanship like manner. No Loose components
	or unsecured wires. All electrical components
	covered inside an enclosure.
	Tether is properly secured at the surface control.
	No exposed copper or bare wire.
	All wires entering and leaving the surface control
	station must have adequate strain relief and wire
	abrasion protection as the wires pass through the
	enclosure. Tape, zip ties, string and similar
	methods are not acceptable
	No AC Power Sources
	Cameras operate off the MATE 12VDC power
	supply through the single attachment point to
	power source
	power source
	All connectors utilized are properly type rated for
	their application. AC only rated connectors not be
	i men application. AC omy rateu connectors not be

used for DC

*Properly sealed means that the wires <u>cannot be exposed</u>, to water. Tape only sealing will allow the conduction of electricity through water.

At minimum joints must be soldered, then sealed with silicone sealent and then finally taped. For in water taping, silicone self-vulcanizing tape is preferred over thermoplastic tape. Cables with exposed male connections on both ends are not allowed.

4.0 Pneumatic / Hydraulic (if applicable)					
Pneumatic or hydraulic diagrams present?					
Hand or Foot pump only?					
Uses water or air only?					
No Pressure Accumulators?					
Any container that air is being pumped into is					
vented to the pool with vent holes at least '4"					
(6.35mm) diameter?					
5.0 Lasers					
No Lasers Present – Not permitted in SCOUT					
class					
INSPECTION #1 PASSED: 10					
POINTS					
FAILED: Items to correct: (see rear of this sheet)					
INSPECTION #2 PASSED: 10					
POINTS					
FAILED: Items to correct: (see rear of this sheet)					
INSPECTION #3 PASSED: 10					
POINTS					
FAILED: Reason (see rear for details)					
Total Safety Points					

Dn Site I	nspection	[0 to 10	1

Judge:		

Inspection #2: Items to address Judge:

Inspection #3: Reason

Judge:


2019 NAVIGATOR SAFETY INSPECTION SHEET

COMPANY NAME:	COMPANY NUMBER:	Inspection #1: Items to address Judge:
	V COMPETITION	<u>+</u>
Innovations for Inshore: ROV O	perations in Rivers, Lakes, and Dams	
	SAFETY CHECK LIST	
Companies must bring this check list, the ROV, tether, surface		
	safety check. In addition, the SID, technical documentation, and	
	ust be made available to Safety Inspectors during the inspection	
process.		
1.0 Initial Inspection Results	*Properly sealed means that the wires cannot be exposed.	
Fluid Power is used & approved. If powered	to water. Tape only sealing will allow the conduction of	
pumps are being used, see section 4.0 Pnematics	electricity through water.	
and Hydraulics. If only manual pumps are used,		
section 4.0 is not used.	At minimum joints must be soldered, then sealed with	
2.0 ROV Physical	silicone sealant and then finally taped. For in water	
	taping, silicone self-vulcanizing tape is preferred over	
All items attached to ROV are secure.	thermoplastic tape. Cables with exposed male connections	
Hazardous items are identified and protection	on both ends are not allowed.	
provided.		
ALL Propellers are completely shrouded or are	4.0 Pneumatic / Hydraulic (if applicable)	
enclosed inside the frame of the ROV.	Passed pneumatics/hydraulics test.	
No sharp edges or elements of ROV design that	Pneumatic or hydraulic diagrams present?	
could cause injury to personnel or damage to pool	Pneumatic and/or hydraulic component	
surface.		
3.0 ROV Electrical	documentation provided?	
	All pressure lines have minimum pressure rating	Terrentian #2. Terrente address Terdar
Tether is properly secured at the ROV.	100psi (pneumatic) or	Inspection #2: Items to address Judge:
No exposed motors.	300psi (hydraulic)	
Brushless motors are considered exposed unless	stamped on line or verified with specifications	
electrically sealed after purchase. Companies	Valves meet the minimum pressure of	
should provide proof of sealing procedure.	100 psi pneumatic or 300 psi hydraulic	
No exposed copper or bare wire.	Attachment to pressure source is secure.	
All wiring securely fastened and properly sealed*.	Pressure is regulated to	
Any splices in tether are properly sealed*.	40 psi max for pneumatics and	
3.1 Surface Controls Electrical & Physical		
	150 psi max for hydraulies.	
Single attachment point to power source.	Pressure vessels have a stamped pressure rating or	
Anderson Power Plugs for electrical attachment	verification by specification.	
15 amp (or less) single inline fuse within 30cm of	Pressure vessels have current inspection sticker.	
power supply attachment point.	Pressure vessels can be secured on pool deck.	
Surface control station is built in a neat and	Company fabricated pressure accumulator test	
workmanship like manner. No Loose components	results are provided (if used).	
or unsecured wires. All electrical components	No hydraulic fluids are leaking.	
covered inside an enclosure.	Pneumatics utilize compressed air or inert gas	
Tether is properly secured at the surface control.	5.0 Lasers	
No exposed copper or bare wire.		
INO exposed copper or bare wire.	No Lasers – Not permitted for NAVIGATOR	
All wires entering and leaving the surface control		Inspection #3: Reason Judge:
station must have adequate strain relief and wire	INSPECTION #1 PASSED: 10	inspection set reason ounger_
abrasion protection as the wires pass through the	POINTS	
enclosure. Tape, zip ties, string and similar	FAILED: Items to correct: (see rear of this sheet)	
methods are not acceptable		
If used, 120VAC wiring is separated from the DC	INSPECTION #2 PASSED: 10	
wiring (used for AC powered monitor).	POINTS	
If used, 120VAC wiring must be clearly identified	FAILED: Items to correct: (see rear of this sheet)	
from the DC and control voltages with signage	The second	
and/or wire color schemes. If color schemes, key	INSPECTION #3 PASSED: 10	
provided for identification.	POINTS	
Cameras operate off the MATE 12VDC power		
	FAILED: Reason (see rear for details)	
supply through the single attachment point to		
power source	Total Safety Points	
All connectors utilized are properly type rated for	On Site Inspection [0 to 10]	
their application. AC only rated connectors not be		
used for DC		

2.0 Physical All items attached to ROV are secure and will not fall off. Examples:

loose camera

securely attached camera

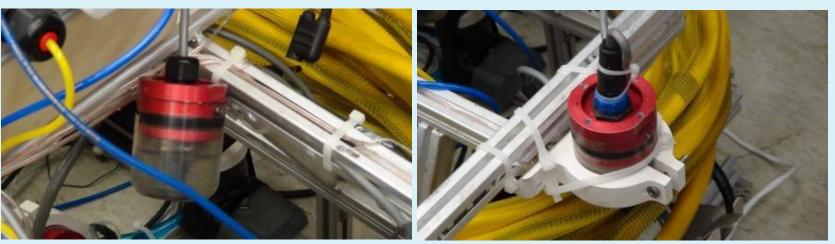


2.0 Physical

No sharp edges or elements of ROV design that could cause injury to personnel or damage to pool surface.

Examples:

The points on the front of this ROV may look cool, but the inspector failed the company during safety inspection for putting something that could be a danger to the divers.

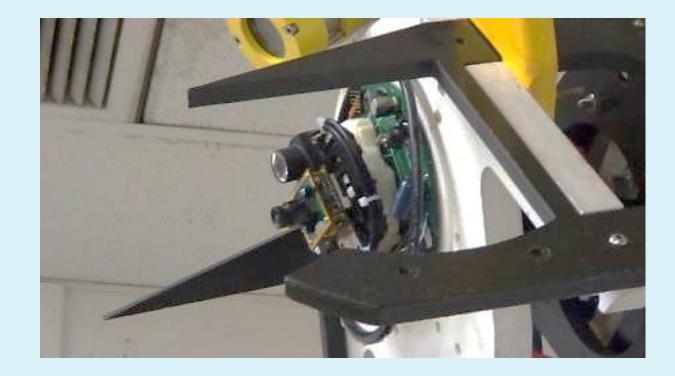

2.0 Physical

Hazardous items are identified and protection provided.

Examples:

Sharp edges on the scoop are painted red; yellow and black safety warning colors are used elsewhere. The company successfully passed their safety inspection because potentially hazardous items that are needed to complete a task are identified and protected.



2.0 Physical

ALL Propellers must be shrouded or completely enclosed inside the frame of the ROV

If your ROV bumps up against the wall of the pool, turning propellers should not impact the side of the pool or other objects.



Insufficient shrouding

3.0 Electrical Single attachment point to power source.

Anderson powerpole connectors are required to connect to the MATE power source.

A single inline fuse (not shown) must be within 30cm of attachment point (power connectors). Fuses in each line are acceptable.

NAVIGATOR and SCOUT class utilize the RED & BLACK powerpole connectors. Looking at the end of the connectors, you will see a small A on the end of each. With the tip of the A pointing up, black should be on the left and red on the right





3.0 Electrical

Problems with the Anderson powerpoles have developed when teams do NOT use the proper crimper for these connectors.


Standard Electricians Crimpers will NOT work!

The crimp must be a roll crimp not a "squish" crimp.




3.0 Electrical System Interconnection Diagram (SID)

• System Interconnection Diagram (SID) A SID is a system-level, connection diagram that includes electrical and, if applicable, fluid power wiring information. Board-level and component-level schematics should not be included; however, these may be brought to the engineering evaluation for reference purposes. The intent is to provide the competition judges with a one-line diagram showing how the various systems are interconnected without the detail of each and every wire.

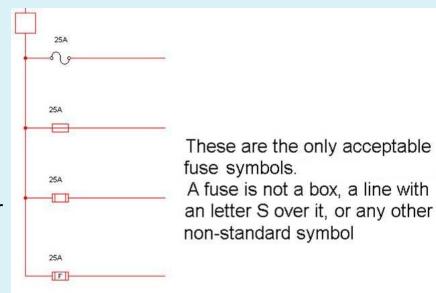


See the Competition Manual or the next two slides for examples of a SID. However, you must create your own SID for your vehicle. Do not directly copy the SID from a MATE resourse, even if it is a proper SID for your vehicle.

Example SID 1

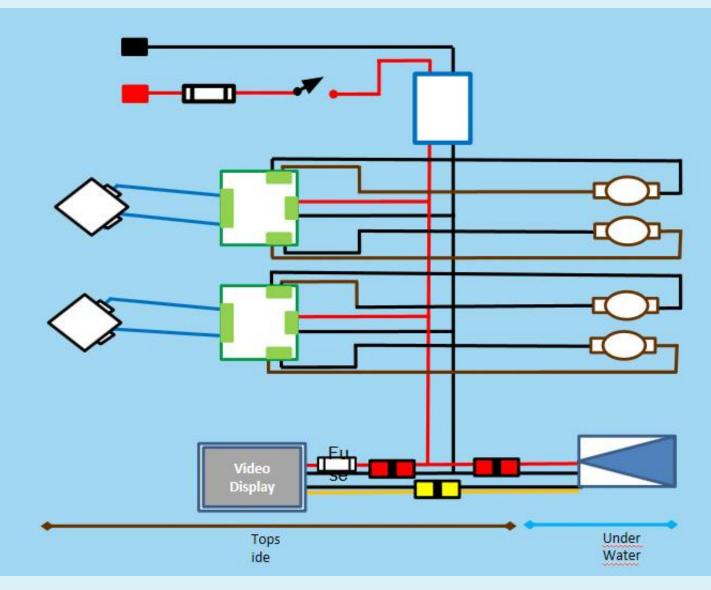


Example SID 2

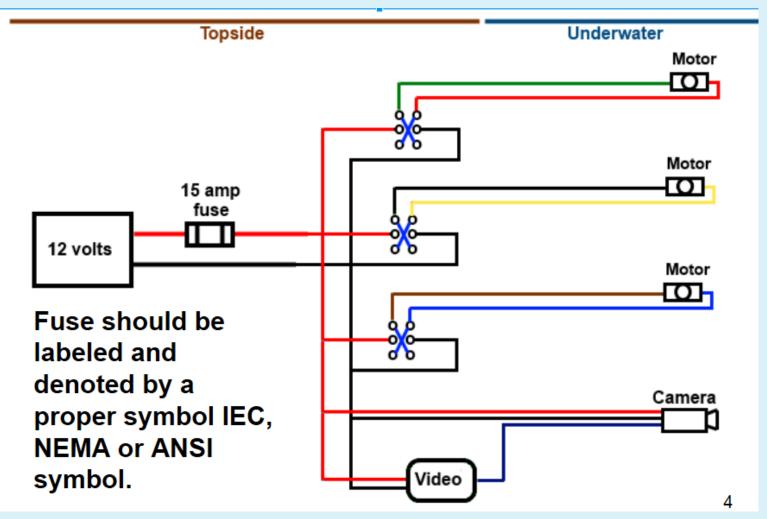

3.0 Electrical Single inline fuse within 30cm of attachment point.

Examples:


This is an example of multiple attachments ahead of the fuse that WILL NOT PASS. In addition, MATE no longer uses banana plugs for power attachment.

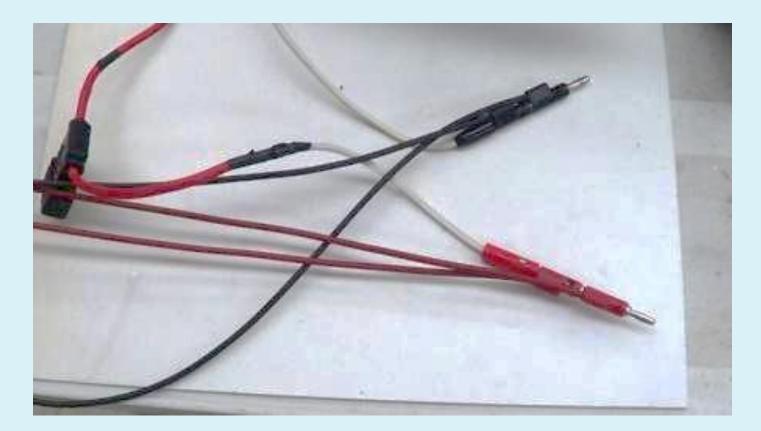

3.0 Electrical **No exposed copper or bare wire. No exposed motors.**

Examples:

These WILL NOT PASS. The motor on the left is both exposed and has bare wire. The motor on the right is exposed and not sealed.

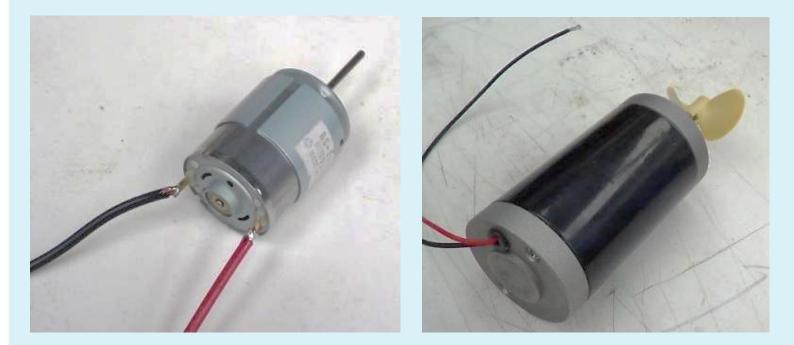

3.0 Electrical **No exposed copper or bare wire.**

Examples:

This WILL NOT PASS. Using banana plugs at both ends of the wire to route power from one section to another violates MATE's safety rules. It is possible for the hot end of the wire to become unplugged and create a safety hazard.



3.0 Electrical *Tether is properly secured at surface control point and at ROV.*

Example:

The wires on the ROV are loose or could get caught in a propeller when moving around the pool. Use tape, cable ties, or other methods to secure the wires away from any moving or potentially dangers parts.




Wires entering into the control box should also be secured. If you accidentally walk the controller away from the ROV, you want any strain to be contained. You do not want to pull wires inside the control box.

3.0 Electrical *Surface controls: All wiring and devices properly secured.*

Examples:

The two pictures below are examples of loose wiring. There is no strain relief and the wires can easily pull loose from their connections. Hot melt glue and tape are not acceptable strain relief items.

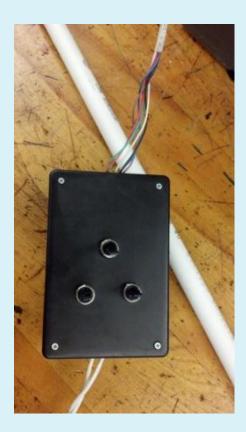



3.0 Electrical *Surface controls: All wiring and devices properly secured.*

Example: both the red/black power wires and the tether wires going into the control box are properly secured by tight strain relief.



3.0 Electrical

Surface controls: All control elements are mounted with wiring inside an enclosure.

There are multiple FAILS in the picture below!



Exposed wiring

Multiple fuses instead of single point fuse for power.

Loose wires.

Alligator clips used for connections.

No strain relief provided for wires coming from power or going to ROV.

SCOUT & NAVIGATOR Class Safety Inspection Sheet Tutorial Fluid Power SCOUT class or NAVIGATOR class using manual pumps only

4.0 Pneumatic / Hydraulic Checklist

- Pneumatic or hydraulic diagrams present?
- Hand or Foot pump only?
- Uses water or air only?
- No Pressure Accumulators?
- Any container that air is being pumped into is vented to the pool with vent holes at least ¼" (6.35mm) in diameter?

SCOUT & NAVIGATOR Class Safety Inspection Sheet Tutorial Fluid Power NAVIGATOR class (only) if using pressurized fluid power.


4.0 Pneumatic / Hydraulic Checklist

- Did you PASS the pneumatics/hydraulics test?
- Do you have your pneumatic or hydraulic SID(s) present?
- ◆ Are pneumatic and/or hydraulic component specifications provided?
- ◆ Are you using pressure rated lines and fittings?
- ◆ Is your attachment to pressure source is secure?
- Is your pressure regulated to 40psi max for pneumatics and 150 psi max for hydraulics? COMPANIES MUST PROVIDE THE REGULATOR.
- Do your pressure vessels have a stamped pressure rating or verification by specification and do the pressure vessels have current inspection sticker?
- Are your pressure vessels secured on pool deck and not rolling around?
- If a company fabricated pressure accumulator is used, are pressure test results provided?
- Are hydraulic fluids leaking?
- Do your pneumatics utilize compressed air or inert gas?

SCOUT & NAVIGATOR Class Safety Inspection Sheet Tutorial Fluid Power NAVIGATOR class (only) if using pressurized fluid power.

4.0 Pneumatic / Hydraulic Examples of Tank Certifications and Inspection Stickers







The tank must have a current visual inspection certificate (above) AND current hydrostatic test stamp (on the right).



5.0 Laser Checklist

LASERS ARE NOT PERMITTED IN SCOUT OR NAVIGATOR CLASS

SAFETY FIRST!

Our goal is not to fail teams and keep them from competing, but rather to run a fair and SAFE competition for all.

If you have a question or concern, You can ask your question on the MATE forum boards at: <u>https://www.marinetech.org/forums/</u> or contact that MATE ROV Competition Technical Manager at <u>mgardner@marinetech.org</u>. In this case it is better to ask for permission, not forgiveness. Remember, it is better to be SAFE than sorry!